



中国国家强制性产品认证证书

证书编号: 2021012313369926

发证日期: 2023年03月30日

有效期至: 2026年02月10日

认证委托人名称 胡默尔股份公司
及注册地址 德国, 登茨林根 (79211), 莉丝·迈特纳大街 2 号

产品生产者名称 胡默尔股份公司
及注册地址 德国, 登茨林根 (79211), 莉丝·迈特纳大街 2 号

生产企业名称 胡默尔股份公司
及生产地址 德国, 登茨林根 (79211), 莉丝·迈特纳大街 2 号

产品名称和系列、规格、型号 电缆引入装置
型号: HSK-□-□-□-□ □; 防爆标志: Ex eb IIC Gb; Ex ta IIIC Da; 可代表螺纹规格及相关文件编号详见附件。

产品标准和
技术要求 GB/T 3836.1-2021;GB/T 3836.3-2021;GB/T 3836.31-2021

上述产品符合 CNCA-C23-01:2019 认证规则的要求, 特发此证。
证书有效期内本证书的有效性依据发证机构的定期监督获得保持。
本证书为变更证书, 证书首次颁发日期: 2021 年 02 月 10 日

可通过扫描下方二维码或登录国家认监委网站 (www.cnca.gov.cn) 查验证书信息



签发:

谢肇煦



中国质量认证中心





CERTIFICATE FOR CHINA COMPULSORY PRODUCT CERTIFICATION

CERTIFICATE NO.: 2021012313369926

Valid from: Mar.30,2023

Valid until: Feb.10,2026

NAME AND REGISTERED ADDRESS OF THE APPLICANT HUMMEL AG
Lise-Meitner-Strasse 2, 79211 Denzlingen, Germany

NAME AND REGISTERED ADDRESS OF THE MANUFACTURER HUMMEL AG
Lise-Meitner-Strasse 2, 79211 Denzlingen, Germany

NAME AND LOCATION OF THE FACTORY HUMMEL AG
Lise-Meitner-Strasse 2, 79211 Denzlingen, Germany

PRODUCT MODEL(S) Cable gland
Type of Product: HSK-□-□-□-□; Marking: Ex eb IIC Gb; Ex ta IIIC Da; The thread specification and related document numbers can be seen in the appendix.

STANDARDS AND TECHNICAL REQUIREMENTS GB/T 3836.1-2021;GB/T 3836.3-2021;GB/T 3836.31-2021

This is to certify that the above mentioned product(s) complies with the requirements of implementation rules for compulsory certification(REFNO. CNCA-C23-01:2019)

The validity of the certificate is subject to positive result of the regular follow up inspection by issuing certification body until the expiry date.

Date of original issued: Feb.10,2021

The certificate information is available through the QR code below or CNCA's website: www.cnca.gov.cn



SIGNATURE:

谢肇煦



CHINA QUALITY CERTIFICATION CENTRE





中国国家强制性产品认证证书

证书编号: 2021012313369926

第 1 页 / 共 4 页

本证书及附件应同时使用, 信息查验说明见证书页

纸号: 3187636

1.可代表螺纹规格及总装配图纸号:

序号	型号规格	防爆标志	螺纹规格	外壳防护等级	总装配图号
1	HSK-INOX-EMV-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID80406
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36		
2	HSK-INOX-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID80399
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36		
3	HSK-INOX-PVDF-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID80416
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36		
4	HSK-INOX-PVDF-EMV-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID81023
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36		
5	HSK-K-MZ-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5/M50×1.5/M63×1.5	IP66/68	1215160150/1215200150/1215250150/1215320150/1215400150/1215500150/1215630150
			Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		1215090114/1215110114/1215130114/1215160114/1215210114/1215290114/1215360114/1215420114



中国质量认证中心





中国国家强制性产品认证证书

证书编号: 2021012313369926

第 2 页 / 共 4 页

本证书及附件应同时使用, 信息查验说明见证书页

纸号: 3187636

					114/1215480114
6	HSK-M-EMV-D-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID80395
			Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36		
7	HSK-M-EMV-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5/M50×1.5/M63×1.5	IP66/68	PROFILEID80394
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		
			NPT3/8", NPT1/2", NPT3/4"		
8	HSK-M-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5/M50×1.5/M63×1.5	IP66/68	PROFILEID80393
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		
			NPT3/8", NPT1/2", NPT3/4", NPT1"		
9	HSK-M-PVDF-EMV-Ex □	Ex eb IIC Gb Ex ta IIIC Da	Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48	IP66/68	PROFILEID80410
			NPT3/8", NPT1/2", NPT3/4"		
10	HSK-M-PVDF-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID80409
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		
			NPT3/8", NPT1/2", NPT3/4"		
11	HSK-MZ-EMV-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5/M50×1.5/M63×1.5	IP66/68	PROFILEID80397
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		



中国质量认证中心





中国国家强制性产品认证证书

证书编号: 2021012313369926

第3页 / 共4页

本证书及附件应同时使用, 信息查验说明见证书页

纸号: 3187636

			NPT3/8", NPT1/2", NPT3/4"		
12	HSK-MZ-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5/M50×1.5/M63×1.5	IP66/68	PROFILEID80396
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		
			NPT3/8", NPT1/2", NPT3/4", NPT1"		
13	HSK-MZ-PVDF-EMV-Ex □	Ex eb IIC Gb Ex ta IIIC Da	Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48	IP66/68	PROFILEID80411
			NPT3/8", NPT1/2", NPT3/4"		
14	HSK-MZ-PVDF-Ex □	Ex eb IIC Gb Ex ta IIIC Da	M12×1.5/M16×1.5/M20×1.5/M25×1.5/M32×1.5/M40×1.5	IP66/68	PROFILEID80417
			Pg7/Pg9/Pg11/Pg13.5/Pg16/Pg21/Pg29/Pg36/Pg42/Pg48		
			NPT3/8", NPT1/2", NPT3/4"		

2. 型号解释:



中国质量认证中心






中国国家强制性产品认证证书

证书编号：2021012313369926

第 4 页 / 共 4 页

本证书及附件应同时使用，信息查验说明见证书页

纸号：3187636

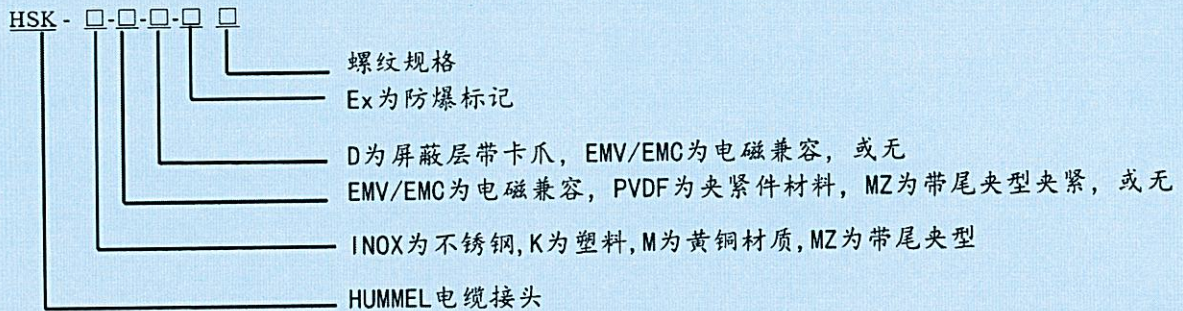

3.使用环境温度：

-60℃ ~ +95℃ (HSK-M-Ex /HSK-INOX 标准型)

-20℃ ~ +130℃(HSK-M-Ex /HSK-INOX 含 PVDF 型)

-20℃ ~ +70℃(HSK-K-MZ-Ex)

4.特殊使用条件：

4.1 HSK-K-MZ-Ex 系列产品的抗机械危险风险较低（冲击高度 0.4m，质量 1kg），应防止受到更高冲击能量水平的影响；

4.2 HSK-M-...-Ex 和 HSK-INOX-...-Ex 系列产品仅能承受 25%拉力的夹紧试验，使用时用户应提供夹紧措施，防止电缆受到的拉力或扭矩传到连接件上。

5.产品结构以认证机构批准的图纸为准。



中国质量认证中心

