

Typ 2, 4+4+4+PE

7.084.954.101 / 7.084.954.102

1. max. 40 mm

2. 3 - 4 mm
Power + PE
+ Signal

3. x

4. x
Kontakt ø 1 mm = max. 4 mm Abisolierlänge
Kontakt ø 2 mm = max. 7 mm Abisolierlänge

5. crimpen
crimpen
(5x Power, 4x Signal)

6. max. 25 mm Ethernet EMV

7. x

8. x
Kontakt ø 0,8 mm = max. 4 mm Abisolierlänge


9. crimpen
4x Ethernet

10. klick
max. 25 mm Ethernet EMV

Typ 2, 4+4+4+PE

7.084.954.101 / 7.084.954.102


11.

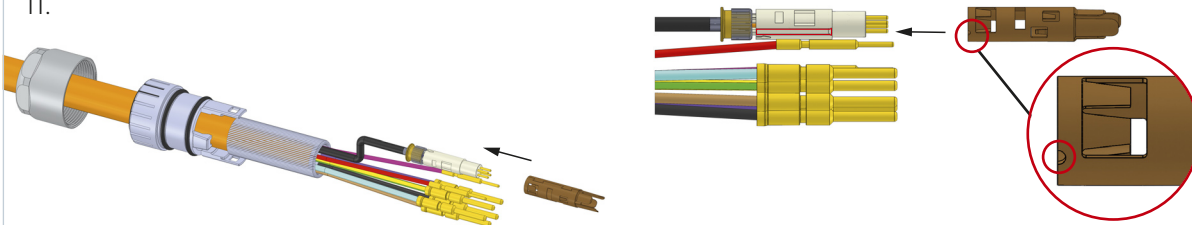


12.1




12.2




12.3




12.4

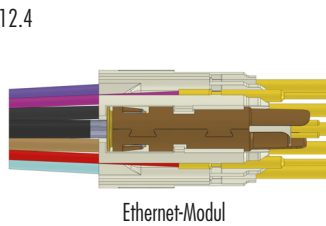

13.

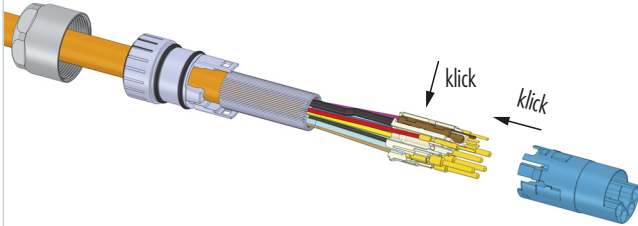

14.

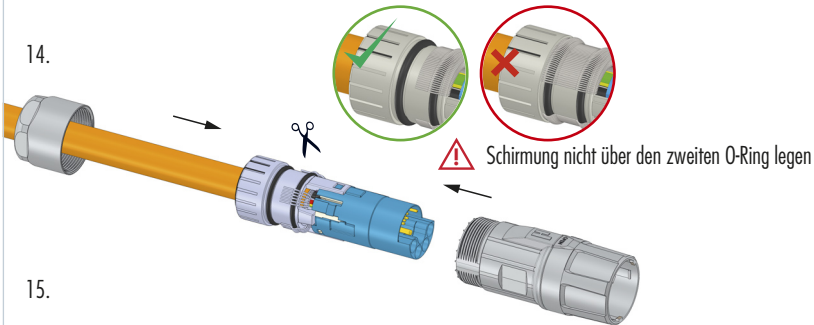

15.

