


EXIOS +MZ nickel plated brass

Item number 16Z5100370

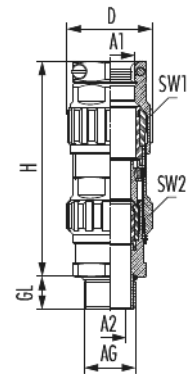

Technical data

Material	Nickel-plated brass
Seal	VMQ (silicone)
Material o-ring	VMQ (silicone)
Clamping insert	Polyamide 6
Armour	Metallic armour or screen
Protection class	IP 66 , IP 67 , IP 68 - 5bar/30min
Ex-protection level	Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , II 1D Ex ta IIIC Da
Temperature range	-60 °C to +105 °C
Variant	NPT
External thread (AG)	NPT 1"
Size	32
A1	22 - 32,5 mm
A2	16,9 - 26 mm
Thread length (GL)	25 mm
Height (H)	107 mm



EXIOS +MZ nickel plated brass

Item number 16Z5100370

Wrench size (SW1/SW2)	46/46 mm
D	52 mm
Armouring clamping ring 1	0 - 0,7 mm
Armouring clamping ring 2	1,3 - 2 mm
Armouring clamping ring 3 (optional)	0,7 - 1,4 mm
Tightening torque	30 Nm

EXIOS +MZ nickel plated brass

Item number 16Z5100370

Commercial data

Packaging Unit	1
EAN code	4033878001509
Weight	0.7499 kg
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-34
Customs tariff number	74198090

Note:

