


# EXIOS +MZ nickel plated brass

Item number 16Z5540370

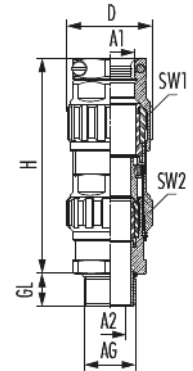

## Technical data

Material	Nickel-plated brass
Seal	VMQ (silicone)
Material o-ring	VMQ (silicone)
Clamping insert	Polyamide 6
Armour	Metallic armour or screen
Protection class	IP 66 , IP 67 , IP 68 - 5bar/30min
Ex-protection level	Class I Div 2 Groups A,B,C,D , Class II Div 1 Groups E,F,G , II 1D Ex ta IIIC Da
Temperature range	-60 °C to +105 °C
Variant	NPT
External thread (AG)	NPT 1 1/4"
Size	40
A1	28 - 39,5 mm
A2	22 - 33 mm
Thread length (GL)	26 mm
Height (H)	120 mm



# EXIOS +MZ nickel plated brass

Item number 16Z5540370

Wrench size (SW1/SW2)	55/55 mm
D	64 mm
Armouring clamping ring 1	0 - 0,7 mm
Armouring clamping ring 2	1,3 - 2 mm
Armouring clamping ring 3 (optional)	0,7 - 1,4 mm
Tightening torque	50 Nm

# EXIOS +MZ nickel plated brass

Item number 16Z5540370

## Commercial data

Packaging Unit	1
EAN code	4033878001585
ETIM 7	EC000441
ETIM 8	EC000441
ETIM 9	EC000441
eCl@ss 10.1	27-14-44-34
Customs tariff number	74198090

## Note:

